




## HIGHWAY RIB M160

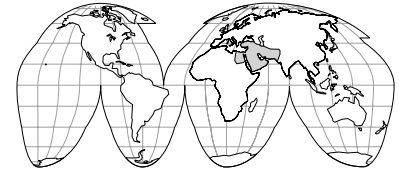

The M160 has been developed for all wheel positions on highway use. Its optimally distributed ribs with open slits and multiple sipes provide irregular wear resistance. The M160 also has superior wear life and resistance to tear, cut and chip by special compound.

Rim Dia.	TIRE SIZE	LOAD INDEX / SPEED SYMBOL	PLY RATING	TYPE	SIDE WALL	TREAD DEPTH (mm)	INFLATED DIMENSION		LOADED DIMENSION		MEASURING RIM (Inch)	ALTERNATE RIM (Inch)
							OVERALL DIA. (mm)	OVERALL WIDTH (mm)	STATIC RADIUS (mm)	STATIC WIDTH (mm)		
24	1200 R24	156/153K	-	TT	BL	14.4	1210	318	563	347	8.50	8.50 - 9.00

[TYPE] TT: TUBE TYPE

[SIDE WALL] BL: BLACK LETTERS

Data as of October 2010. All products of Toyo Tires are subject to continuous development. Toyo Tires reserves the right to change construction, materials or specifications without notice or obligation.