




## HIGHWAY TRACTION M608(F)(Z)

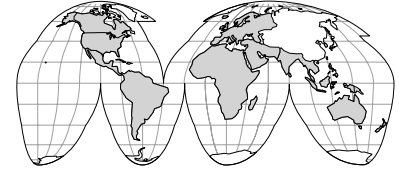

This low-profile tire has an aggressive traction pattern for drive axles and also offers longer tread life because of its large contact area and deeper tread.

Rim Dia.	TIRE SIZE	LOAD INDEX / SPEED SYMBOL	PLY RATING	TYPE	SIDE WALL	TREAD DEPTH (mm)	INFLATED DIMENSION		LOADED DIMENSION		MEASURING RIM (Inch)	ALTERNATE RIM (Inch)
							OVERALL DIA. (mm)	OVERALL WIDTH (mm)	STATIC RADIUS (mm)	STATIC WIDTH (mm)		
△ 22.5	315/80 R22.5	154/150M	-	TL	BL	18.0	1085	312	505	339	9.00	9.00 - 9.75
	9 R22.5	136/134L	-	TL	BL	14.9	973	225	452	245	6.75	6.00 - 7.50
△ 19.5	285/70 R19.5	145/143M	-	TL	BL	16.3	899	280	418	300	8.25	8.25 - 9.00
	285/70 R19.5	145/143L	-	TL	BL	16.4	899	280	418	300	8.25	7.50 - 9.00
	265/70 R19.5	140/138M	-	TL	BL	15.8	875	260	407	280	7.50	7.50 - 8.25
	245/70 R19.5	136/134M	-	TL	BL	15.4	844	240	392	260	7.50	7.50
	245/70 R19.5	133/131L	-	TL	BL	15.4	844	240	392	260	7.50	6.75 - 7.50
	□ 225/70 R19.5	128/126L	-	TL	BL	15.9	821	212	382	228	6.00	6.00 - 6.75
	□ 225/70 R19.5	125/123L	-	TL	BL	15.9	821	212	382	228	6.00	6.00 - 6.75
	○ 225/70 R19.5	128/126L			TL	BL	15.9	821	212	382	228	6.00
○ 225/70 R19.5	125/123L			TL	BL	15.9	821	212	382	228	6.00	6.00 - 6.75

△ : M608Z

□ : M608F

○ : M608 (with stub hole)

[TYPE] TL: TUBELESS

[SIDE WALL] BL: BLACK LETTERS

Data as of October 2010. All products of Toyo Tires are subject to continuous development. Toyo Tires reserves the right to change construction, materials or specifications without notice or obligation.