




# SEMI RACING PROXES R888

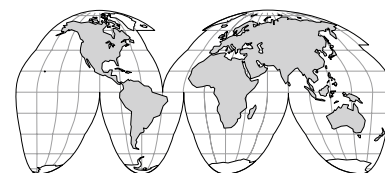

The Proxes R888 competition radial has been developed to deliver maximum dry handling and quick lap time for the racing events such as competition or "track day" events. With its unique and functional tread design, the Proxes R888 is a key to success of winning competitions.

1  
PCR

RIM DIA.	ASPECT RATIO	TIRE SIZE	LOAD INDEX / SPEED SYMBOL	SIDE WALL	TREAD DEPTH (mm)	INFLATED DIMENSION		LOADED DIMENSION		MEASURING RIM WIDTH (Inch)	ALTERNATE RIM (Inch)	
						OVERALL DIA. (mm)	OVERALL WIDTH (mm)	STATIC RADIUS (mm)	STATIC WIDTH (mm)			
20	30	315/30ZR20	(101Y)	BL	5.0	700	318	329	347	11.0	10.50 - 11.50	
	35	285/35ZR20	(100Y)	BL	5.0	704	291	330	317	10.0	9.50 - 11.00	
19	30	305/30ZR19	102Y XL	BL	5.0	673	305	316	332	11.0	10.50 - 11.50	
		295/30ZR19	100Y XL	BL	5.0	661	298	311	325	10.5	10.00 - 11.00	
		265/30ZR19	93Y XL	BL	5.0	645	270	305	294	9.5	9.00 - 10.00	
	35	235/35ZR19	87Y	BL	5.0	652	240	307	262	8.5	8.00 - 9.50	
18	30	335/30ZR18	102Y	BL	5.0	660	338	308	369	12.0	11.50 - 12.50	
		315/30ZR18	98Y	BL	5.0	648	318	303	347	11.0	10.50 - 11.50	
		295/30ZR18	98Y XL	BL	5.0	637	299	299	326	10.5	10.00 - 11.00	
		285/30ZR18	97Y XL	BL	5.0	631	288	296	314	10.0	9.50 - 10.50	
	35	305/35ZR18	-	BL	5.0	668	316	311	344	11.0	10.00 - 12.00	
		275/35ZR18	99Y XL	BL	5.0	652	280	305	306	9.5	9.00 - 11.00	
		265/35ZR18	97Y XL	BL	5.0	646	274	302	299	9.5	9.00 - 10.50	
		255/35ZR18	94Y XL	BL	5.0	637	260	299	283	9.0	8.50 - 10.00	
	40	275/40ZR18	99W	BL	5.0	678	279	315	304	9.5	9.00 - 11.00	
		245/40ZR18	93Y	BL	5.0	653	250	305	273	8.5	8.00 - 9.50	
		235/40ZR18	91Y	BL	5.0	648	244	303	266	8.5	8.00 - 9.50	
		225/40ZR18	92Y XL	BL	5.0	638	224	299	244	8.0	7.50 - 9.00	
		225/40ZR18	92W XL	BL	5.0	638	224	299	244	8.0	7.50 - 9.00	
17	35	315/35ZR17	102W	BL	5.0	650	320	301	349	11.0	10.50 - 12.50	
	40	275/40ZR17	98W	BL	5.0	652	280	302	305	9.5	9.00 - 11.00	
		255/40ZR17	94W	BL	5.0	638	265	296	289	9.0	8.50 - 10.00	
		255/40ZR17	-	BL	5.0	638	265	296	289	9.0	8.50 - 10.00	
		245/40ZR17	91W	BL	5.0	627	250	292	273	8.5	8.00 - 9.50	
		235/40ZR17	90W	BL	5.0	624	245	291	267	8.5	8.00 - 9.50	
			205/40ZR17	84W XL	BL	5.0	598	212	281	231	7.5	7.00 - 8.00
	45	235/45ZR17	93W	BL	5.0	643	242	298	264	8.0	7.50 - 9.00	
		235/45ZR17	-	BL	5.0	643	242	298	264	8.0	7.50 - 9.00	
		225/45ZR17	94W XL	BL	5.0	634	231	295	252	7.5	7.00 - 8.50	
225/45 R17		91V	BL	5.0	634	231	295	252	7.5	7.00 - 8.50		
215/45ZR17		91W XL	BL	5.0	624	216	291	235	7.0	7.00 - 8.00		
16	45	245/45ZR16	94W	BL	5.0	621	248	287	270	8.0	7.50 - 9.00	
		225/45ZR16	89W	BL	5.0	605	228	281	249	7.5	7.00 - 8.50	
		225/45 R16	89V	BL	5.0	605	228	281	249	7.5	7.00 - 8.50	
	50	255/50ZR16	99W	BL	5.0	657	269	301	294	8.0	7.00 - 9.00	
		225/50ZR16	92W	BL	5.0	628	235	290	256	7.0	6.00 - 8.00	
		215/50ZR16	90W	BL	5.0	619	228	286	249	7.0	6.00 - 7.50	
		195/50ZR16	84W	BL	5.0	598	200	278	218	6.0	5.50 - 7.00	
		195/50 R16	84V	BL	5.0	599	203	278	221	6.0	5.50 - 7.00	
	55	205/55ZR16	90W	BL	5.0	628	213	290	232	6.5	5.50 - 7.50	

# PROXES R888

RIM DIA.	ASPECT RATIO	TIRE SIZE	LOAD INDEX / SPEED SYMBOL	SIDE WALL	TREAD DEPTH (mm)	INFLATED DIMENSION		LOADED DIMENSION		MEASURING RIM WIDTH (Inch)	ALTERNATE RIM (Inch)
						OVERALL DIA. (mm)	OVERALL WIDTH (mm)	STATIC RADIUS (mm)	STATIC WIDTH (mm)		
☆ ☆ ☆ ☆ ☆ □● ☆● □ ☆ ☆□●	45	225/45ZR15	87W	BL	5.0	579	227	268	248	7.5	7.00 - 8.50
	50	235/50ZR15	94W	BL	5.0	614	245	281	267	7.5	6.50 - 8.50
		225/50ZR15	91W	BL	5.0	603	230	277	251	7.0	6.00 - 8.00
		215/50ZR15	88W	BL	5.0	594	228	274	249	7.0	6.00 - 7.50
		205/50ZR15	86W	BL	5.0	584	216	270	235	6.5	5.50 - 7.50
		205/50 R15	86V	BL	5.0	584	216	270	235	6.5	5.50 - 7.50
		195/50 R15	82V	BL	5.0	572	200	265	217	6.0	5.50 - 7.00
		195/50 R15	82H	BL	5.0	572	200	265	218	6.0	5.50 - 7.00
	165/50 R15	72V	BL	5.0	546	163	255	178	5.0	4.50 - 6.00	
55	195/55 R15	85V	BL	5.0	592	203	273	221	6.0	5.50 - 7.00	
☆ ☆ ☆ ☆ □●	50	225/50 R14	89V	BL	5.0	580	235	265	256	7.0	6.00 - 8.00
	55	205/55 R14	85V	BL	5.0	579	213	265	232	6.5	5.50 - 7.50
	60	185/60 R14	82V	BL	5.0	574	188	263	205	5.5	5.00 - 6.50
		185/60 R14	82H	BL	5.0	574	188	263	205	5.5	5.00 - 6.50
		185/60 R14	80V	BL	5.0	549	188	250	205	5.5	5.00 - 6.50
☆ ☆ ● ☆ □●	45	225/45 R13	84V	BL	5.0	529	223	243	243	7.5	7.00 - 8.50
	60	205/60 R13	86V	BL	5.0	573	209	260	228	6.0	5.50 - 7.50
		205/60 R13	86H	BL	5.0	572	212	259	231	6.0	7.50 - 7.50
		185/60 R13	80V	BL	5.0	549	188	250	205	5.5	5.00 - 6.50
		185/60 R13	80H	BL	5.0	549	186	250	203	5.5	5.00 - 6.50

☆: 2G compound  
 □: 3G compound  
 ●: SG compound  
 [LOAD INDEX] XL: EXTRA LOAD  
 [SIDE WALL] BL: BLACK LETTERS

Data as of October 2010. All products of Toyo Tires are subject to continuous development. Toyo Tires reserves the right to change construction, materials or specifications without notice or obligation.