




# PROXES T1R

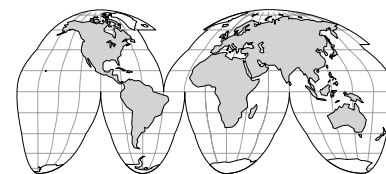

As the V-shape UHP tire, the Proxes T1R has been designed exclusively for sport sedans and coupes. It meets the demands for excellent high-speed stability under both dry and wet conditions with low noise and ride comfort. The Proxes T1R takes advantage of computer simulation technology to provide uniform contact pressure distribution for superb braking and improved wear resistance.

RIM DIA.	ASPECT RATIO	TIRE SIZE	LOAD INDEX / SPEED SYMBOL	SIDE WALL	TREAD DEPTH (mm)	INFLATED DIMENSION		LOADED DIMENSION		MEASURING RIM WIDTH (Inch)	ALTERNATE RIM (Inch)
						OVERALL DIA. (mm)	OVERALL WIDTH (mm)	STATIC RADIUS (mm)	STATIC WIDTH (mm)		
22	25	295/25ZR22	97Y XL	BL	8.2	708	293	338	319	10.5	10.00 - 11.00
		285/25ZR22	95Y XL	BL	8.2	701	290	335	316	10.5	10.50
	30	265/30ZR22	97Y XL	BL	8.2	721	267	343	291	9.5	9.00 - 10.00
		255/30ZR22	95Y XL	BL	8.2	713	254	340	277	9.0	8.50 - 9.50
21	25	295/25ZR21	96Y XL	BL	8.2	685	297	326	324	10.5	10.00 - 11.00
	30	285/30ZR21	100Y XL	BL	8.2	707	284	334	310	10.0	9.50 - 10.50
		255/30ZR21	93Y XL	BL	8.2	688	260	327	283	9.0	8.50 - 9.50
20	25	345/25ZR20	104Y XL	BL	8.2	680	346	321	377	12.5	12.00 - 13.00
		315/25ZR20	99Y XL	BL	8.2	669	320	317	349	11.5	11.00 - 12.00
		305/25ZR20	97Y XL	BL	8.2	660	310	313	338	11.0	10.50 - 11.50
		285/25ZR20	93Y XL	BL	8.2	649	292	309	318	10.5	10.50
	30	305/30ZR20	103Y XL	BL	8.2	692	313	326	341	11.0	10.50 - 11.50
		285/30ZR20	99Y XL	BL	8.2	680	290	321	316	10.0	9.50 - 10.50
		275/30ZR20	97Y XL	BL	8.2	675	270	319	294	9.5	9.00 - 10.00
		265/30ZR20	94Y XL	BL	8.2	669	267	317	291	9.5	9.00 - 10.00
		255/30ZR20	92Y XL	BL	8.2	663	254	314	277	9.0	8.50 - 9.50
		245/30ZR20	90Y XL	BL	8.2	659	242	313	264	8.5	8.00 - 9.00
	35	235/30ZR20	88Y XL	BL	8.2	650	235	309	256	8.5	8.50
		275/35ZR20	102Y XL	BL	7.9	700	269	329	293	9.5	9.00 - 11.00
	40	255/35ZR20	97Y XL	BL	8.2	686	258	323	281	9.0	8.50 - 10.00
		245/35ZR20	95Y XL	BL	8.2	680	244	321	266	8.5	8.00 - 9.50
40	245/40ZR20	99Y XL	BL	7.9	704	248	330	270	8.5	8.00 - 9.50	
19	25	315/25ZR19	98Y XL	BL	8.2	640	324	303	353	11.5	11.00 - 12.00
	30	285/30ZR19	98Y XL	BL	8.2	655	284	309	310	10.0	9.50 - 10.50
		275/30ZR19	96Y XL	BL	8.2	650	270	307	294	9.5	9.00 - 10.00
		265/30ZR19	93Y XL	BL	8.2	645	266	305	290	9.5	9.00 - 10.00
		255/30ZR19	91Y XL	BL	8.2	637	254	302	277	9.0	8.50 - 9.50
	35	285/35ZR19	99Y	BL	8.2	682	285	319	311	10.0	9.50 - 11.00
		275/35ZR19	100Y XL	BL	8.2	675	270	316	294	9.5	9.00 - 11.00
		265/35ZR19	98Y XL	BL	8.2	674	268	316	292	9.5	9.00 - 10.00
		255/35ZR19	96Y XL	BL	8.2	661	256	311	279	9.0	8.50 - 10.00
		245/35ZR19	93Y XL	BL	8.2	656	244	309	266	8.5	8.00 - 9.50
		235/35ZR19	91Y XL	BL	8.2	648	242	306	264	8.5	8.00 - 9.50
	40	225/35ZR19	88Y XL	BL	8.2	640	229	303	250	8.0	7.50 - 9.00
		275/40ZR19	101Y	BL	8.2	701	274	327	298	9.5	9.00 - 10.50
		255/40ZR19	100Y XL	BL	8.2	685	258	320	281	9.0	8.50 - 10.00
		245/40ZR19	98Y XL	BL	8.2	678	247	318	269	8.5	8.00 - 9.50
	45	225/40ZR19	93Y XL	BL	8.2	663	228	312	249	8.0	7.50 - 9.00
245/45ZR19		102Y XL	BL	8.2	705	238	328	259	8.0	7.50 - 9.00	
18	30	285/30ZR18	97Y XL	BL	8.2	628	284	295	310	10.0	9.50 - 10.50
		285/30ZR18	85Y XL	BL	8.2	599	235	284	256	8.5	8.50

# PROXES T1R

1  
PCR

RIM DIA.	ASPECT RATIO	TIRE SIZE	LOAD INDEX / SPEED SYMBOL	SIDE WALL	TREAD DEPTH (mm)	INFLATED DIMENSION		LOADED DIMENSION		MEASURING RIM WIDTH (Inch)	ALTERNATE RIM (Inch)
						OVERALL DIA. (mm)	OVERALL WIDTH (mm)	STATIC RADIUS (mm)	STATIC WIDTH (mm)		
18	35	295/35ZR18	103Y XL	BL	8.2	661	296	308	323	10.5	10.00 - 11.50
		285/35ZR18	101Y XL	BL	8.2	654	285	305	311	10.0	9.50 - 11.00
		275/35ZR18	99Y XL	BL	8.2	649	271	303	295	9.5	9.00 - 11.00
		265/35ZR18	97Y XL	BL	8.2	644	267	301	291	9.5	9.00 - 10.50
		255/35ZR18	94Y XL	BL	8.2	636	257	298	280	9.0	8.50 - 10.00
		245/35ZR18	88Y	BL	8.2	629	241	296	263	8.5	8.00 - 9.50
		225/35ZR18	87Y XL	BL	8.2	616	228	291	249	8.0	7.50 - 9.00
		215/35ZR18	84W XL	BL	8.2	608	219	287	239	7.5	7.00 - 8.50
	205/35ZR18	81Y XL	BL	8.2	601	212	285	231	7.5	7.00 - 8.00	
	40	285/40ZR18	101Y	BL	8.2	683	290	317	316	10.0	9.50 - 11.00
		275/40ZR18	99Y	BL	8.2	673	275	313	300	9.5	9.00 - 11.00
		255/40ZR18	99Y XL	BL	8.2	659	258	307	281	9.0	8.50 - 10.00
		245/40ZR18	97Y XL	BL	8.2	651	244	304	266	8.5	8.00 - 9.50
		235/40ZR18	95Y XL	BL	8.2	643	242	301	264	8.5	8.00 - 9.50
		225/40ZR18	92Y XL	BL	8.2	637	231	299	252	8.0	7.50 - 9.00
	215/40ZR18	89Y XL	BL	8.2	632	218	297	238	7.5	7.00 - 8.50	
	45	255/45ZR18	99Y	BL	8.2	686	250	318	273	8.5	8.00 - 9.50
		245/45ZR18	96Y	BL	8.4	676	242	314	264	8.0	7.50 - 9.00
		235/45ZR18	98Y XL	BL	8.2	669	233	311	254	8.0	7.50 - 9.00
		225/45ZR18	95Y XL	BL	8.2	658	221	307	241	7.5	7.00 - 8.50
215/45ZR18		93Y XL	BL	8.2	654	206	305	225	7.0	7.00 - 8.00	
50	235/50ZR18	101Y XL	BL	8.4	689	243	319	265	7.5	6.50 - 8.50	
17	35	245/35ZR17	87W	BL	8.2	604	245	283	267	8.5	8.00 - 9.50
	40	265/40ZR17	96Y	BL	8.4	643	269	298	293	9.5	9.00 - 10.50
		255/40ZR17	98Y XL	BL	8.2	635	258	295	281	9.0	8.50 - 10.00
		245/40ZR17	95Y XL	BL	8.2	627	246	292	268	8.5	8.00 - 9.50
		235/40ZR17	94Y XL	BL	8.2	619	242	289	264	8.5	8.00 - 9.50
		215/40ZR17	87W XL	BL	8.2	604	222	283	242	7.5	7.00 - 8.50
		205/40ZR17	84W XL	BL	8.2	600	219	281	239	7.5	7.00 - 8.00
	45	255/45ZR17	98Y	BL	8.2	659	256	305	279	8.5	8.00 - 9.50
		245/45ZR17	99Y XL	BL	8.2	651	244	301	266	8.0	7.50 - 9.00
		235/45ZR17	97Y XL	BL	8.2	644	238	299	259	8.0	7.50 - 9.00
		225/45ZR17	94Y XL	BL	8.2	633	222	294	242	7.5	7.00 - 8.50
		215/45ZR17	91W XL	BL	8.2	626	211	292	230	7.0	7.00 - 8.00
		205/45ZR17	88W XL	BL	8.2	616	208	288	227	7.0	6.50 - 7.50
	50	235/50ZR17	96Y	BL	7.6	665	240	307	262	7.5	6.50 - 8.50
		225/50ZR17	94Y	BL	8.2	658	228	304	249	7.0	6.00 - 8.00
		215/50ZR17	91Y	BL	7.6	644	225	299	245	7.0	6.00 - 7.50
205/50ZR17		93Y XL	BL	7.6	635	212	295	231	6.5	5.50 - 7.50	
55	225/55ZR17	97Y	BL	8.4	676	229	311	250	7.0	6.00 - 8.00	
16	35	245/35ZR16	86W	BL	8.2	578	244	270	266	8.5	8.00 - 9.50
	40	225/40ZR16	85W	BL	8.2	586	234	273	255	8.0	7.50 - 9.00
		215/40ZR16	86W XL	BL	8.2	578	222	270	242	7.5	7.00 - 8.50
		195/40 R16	80V XL	BL	8.2	560	204	263	222	7.0	6.50 - 7.50

RIM DIA.	ASPECT RATIO	TIRE SIZE	LOAD INDEX / SPEED SYMBOL	SIDE WALL	TREAD DEPTH (mm)	INFLATED DIMENSION		LOADED DIMENSION		MEASURING RIM WIDTH (Inch)	ALTERNATE RIM (Inch)
						OVERALL DIA. (mm)	OVERALL WIDTH (mm)	STATIC RADIUS (mm)	STATIC WIDTH (mm)		
16	45	245/45ZR16	94W	BL	8.2	625	244	288	266	8.0	7.50 - 9.00
		225/45ZR16	93W XL	BL	8.2	608	227	282	247	7.5	7.00 - 8.50
		205/45ZR16	87W XL	BL	8.2	590	209	275	228	7.0	6.50 - 7.50
		195/45 R16	80V	BL	8.2	583	195	272	213	6.5	6.00 - 7.50
	50	235/50ZR16	95W	BL	8.4	639	246	294	268	7.5	6.50 - 8.50
		225/50ZR16	92W	BL	8.4	628	233	290	254	7.0	6.00 - 8.00
		205/50ZR16	87W	BL	8.4	609	214	282	233	6.5	5.50 - 7.50
		195/50 R16	84V	BL	8.4	600	199	279	217	6.0	5.50 - 7.00
		185/50 R16	81V	BL	8.4	590	191	275	208	6.0	5.00 - 6.50
	55	245/55ZR16	100W	BL	8.4	671	254	306	277	7.5	7.00 - 8.50
		225/55ZR16	99W XL	BL	8.4	651	231	299	252	7.0	6.00 - 8.00
		215/55ZR16	93W	BL	8.4	639	223	294	243	7.0	6.00 - 7.50
		205/55ZR16	91W	BL	8.4	630	212	290	231	6.5	5.50 - 7.50
		195/55 R16	91V XL	BL	8.4	618	200	286	218	6.0	5.50 - 7.00
		195/55 R16	87V	BL	8.4	618	200	286	218	6.0	5.50 - 7.00
15	45	215/45 R15	84V	BL	8.2	575	211	266	230	7.0	7.00 - 8.00
		205/45 R15	81V	BL	8.4	565	207	262	226	7.0	6.50 - 7.50
		195/45 R15	78V	BL	8.2	558	195	260	213	6.5	6.00 - 7.50
	50	225/50 R15	91V	BL	8.4	604	230	277	251	7.0	6.00 - 8.00
		205/50 R15	89V XL	BL	8.4	587	211	271	230	6.5	5.50 - 7.50
		195/50 R15	82V	BL	8.2	576	198	267	216	6.0	5.50 - 7.00
	55	205/55 R15	88V	BL	8.4	605	214	278	233	6.5	5.50 - 7.50
		195/55 R15	85V	BL	8.4	593	203	273	221	6.0	5.50 - 7.00
		185/55 R15	82V	BL	8.4	584	192	270	209	6.0	5.00 - 6.50
14	40	225/40 R14	82V	BL	8.2	535	233	248	253	8.0	7.50 - 9.00
	45	195/45 R14	77V	BL	8.2	532	195	247	213	6.5	6.00 - 7.50
	55	195/55 R14	82V	BL	8.4	568	198	261	216	6.0	5.50 - 7.00

[LOAD INDEX] XL: EXTRA LOAD

[SIDE WALL] BL: BLACK LETTERS

Data as of October 2010. All products of Toyo Tires are subject to continuous development. Toyo Tires reserves the right to change construction, materials or specifications without notice or obligation.